




Teknisk beskrivning objekt 6712

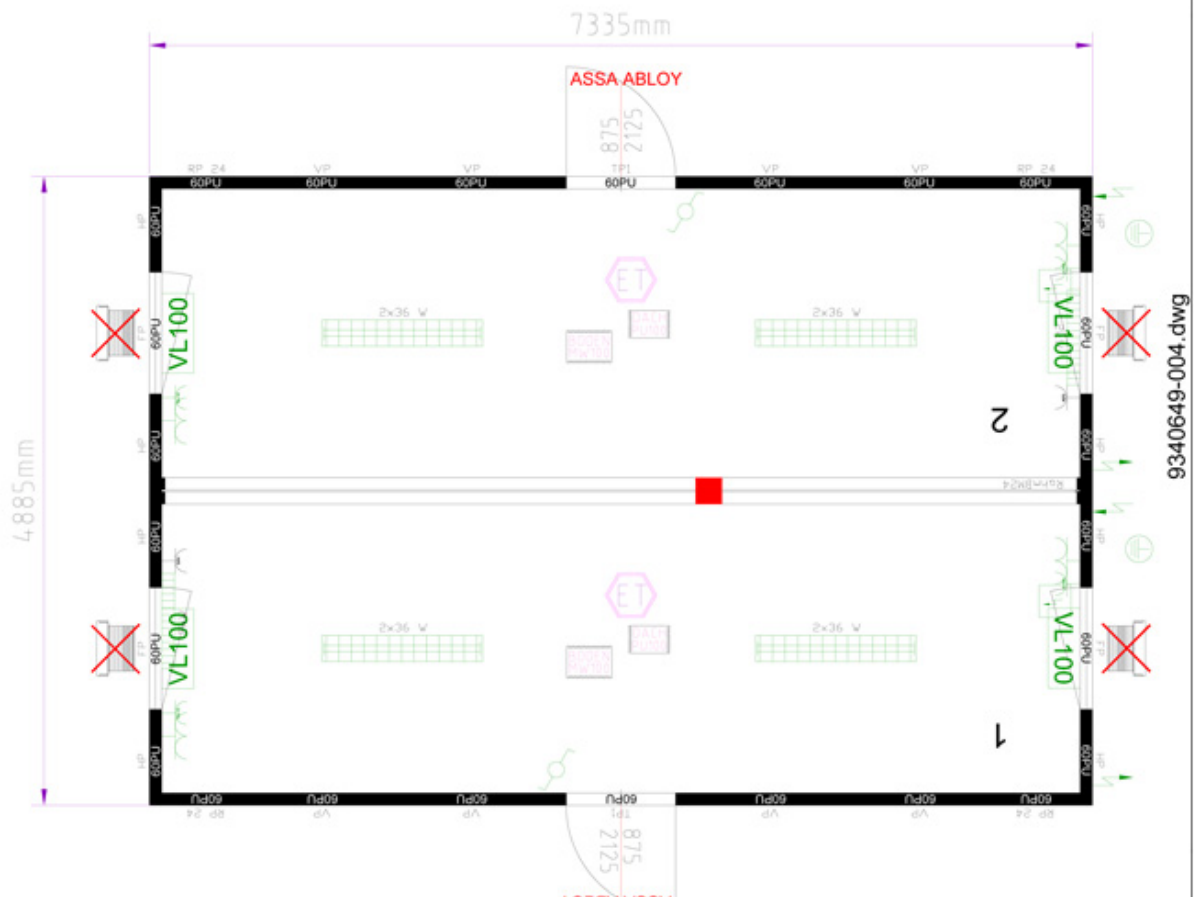

2 NO. Portable cabin 24'

Drawing No. 9340649-004

Specification

- Construction type Assembled
- External cabin height 2800 mm
- Internal height 2540 mm

Paint

- Colour of container frame RAL 7024 Graphite grey
- Panel colour RAL 7035 Light Grey

Interior decor

- Interior decor Coated Steel Sheet White
- Internal finish ceiling Chipboard White

Insulation

- Wall insulation PU foam 60 mm
- Roof insulation PU foam 100 mm
- Floor insulation Mineral wool 100 mm

Electrics

- Design of electrical connection Including CEE countersinks, including consumer box
- Electrics SKAN Standard (400V/32A/5-pin)

Design of floor construction

- Forklift pockets distance 2050 mm
- Floor panel Cement-bound chipboard floor
- Floor cover Flooring "ETERNAL"

Description

4 NO. Wall reinforcement

4 NO. Office window with rotary/tilt fitting without roller shutter

2 NO. External steel door

Standard dimensions (width): 875 mm

Light passage width: 811 mm

Heating, ventilating and cooling equipment

4 NO. Ventilation unit with heat recovery VL100

2 NO. E-convector 2 kW

Additional equipment

Linking kit

1 NO. Pillar for supporting the roof frame

1 SET External linking kit 24'/30'

1 NO. CEE coupling cable, 32 A / 5 -pin, 1,5 running metre

1 NO. Longitudinal connecting material 24'

Other equipment and details according to our technical description, which we can certainly send to you on request